



PLAN

BLOCKAID - BACL190

SCALE 1:20




ELEVATION

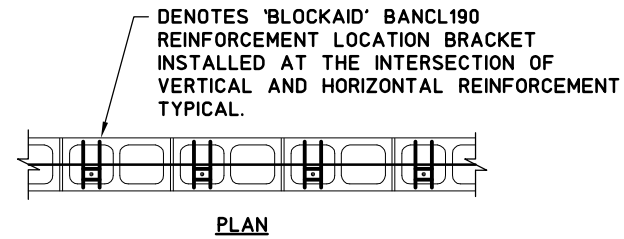


PLAN

BLOCKAID - BANCL190

SCALE 1:20

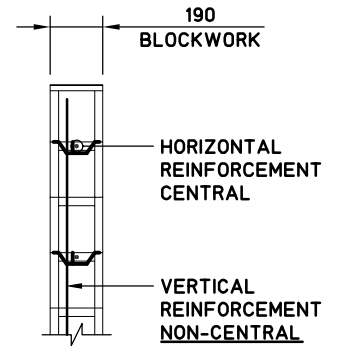


ELEVATION




BLOCKAID - BACL190

SCALE 1:10

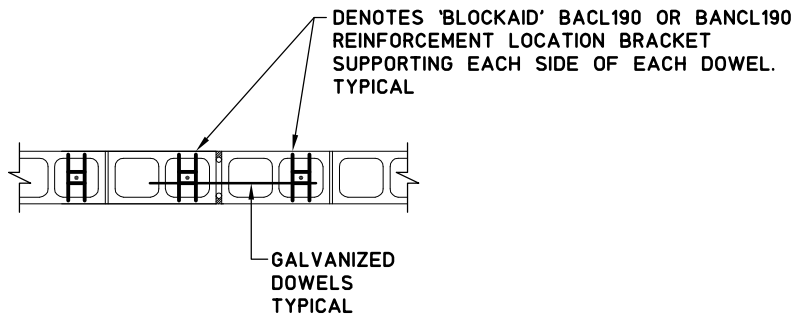

TYPICAL BLOCKWALL VCJ 'BLOCKAID' DETAIL

SCALE 1:20



BLOCKAID - BANCL190

SCALE 1:10

RECOMMENDED INSTALLATION:
BLOCKAID AT ALL REINFORCEMENT INTERSECTIONS
MINIMUM SLUMP 250MM WITH 7-10MM AGGREGATE
VIBRATE OR ROD TO COMMON PRACTICE

NOTE:
GROUT COVER TO REINFORCEMENT SHALL
BE MAINTAINED BY THE USE OF PLASTIC
'BLOCKAID' REINFORCEMENT LOCATION
BRACKETS AT THE INTERSECTION OF ALL
HORIZONTAL AND VERTICAL REINFORCEMENT.

ADDITIONAL BLOCKWALL NOTES

1. Grout cover to reinforcement shall be maintained by the use of plastic 'BLOCKAID' reinforcement location brackets at the intersection of all horizontal and vertical reinforcement.

TYPICAL 190 BLOCKWORK 'BLOCKAID' DETAILS