



BLOCKAID - BA CL190
SCALE 1:20





BLOCKAID - BA CL190
SCALE 1:10


BLOCKAID BA CL190 PROVIDES AN ANNULUS OF GROUT 2 TIMES THE DIA OF THE VERTICAL BAR, LOCATED SYMMETRICALLY IN THE CROSS SECTION

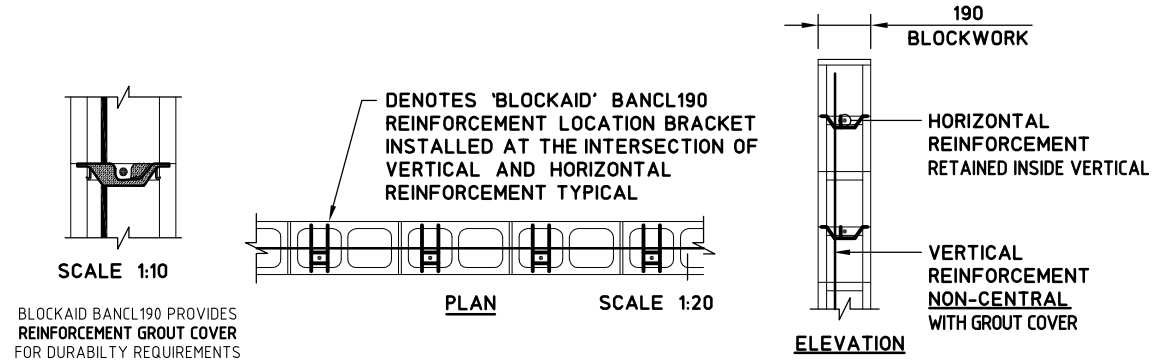

BLOCKAID - BA NCL190

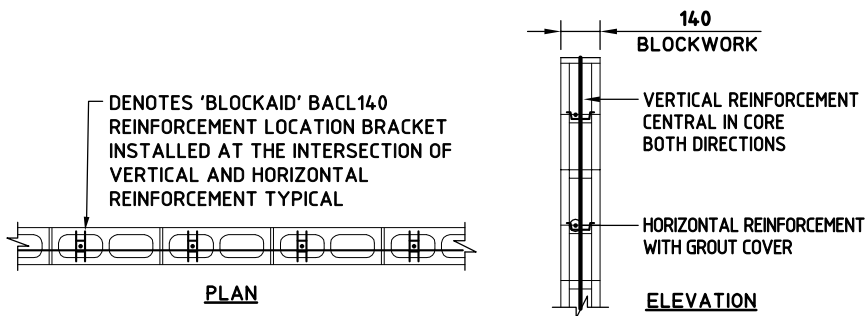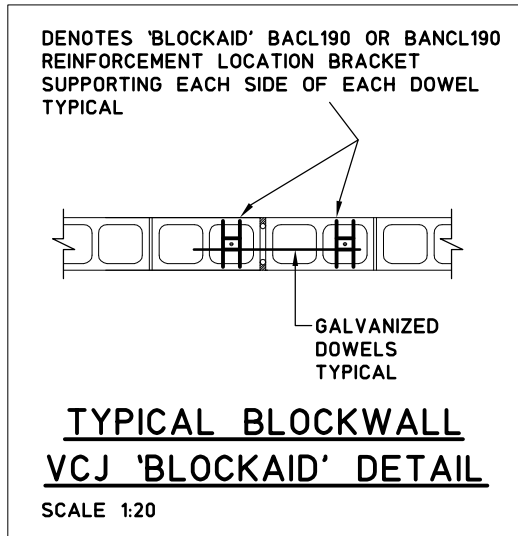

BLOCKAID - BA CL140
SCALE 1:20

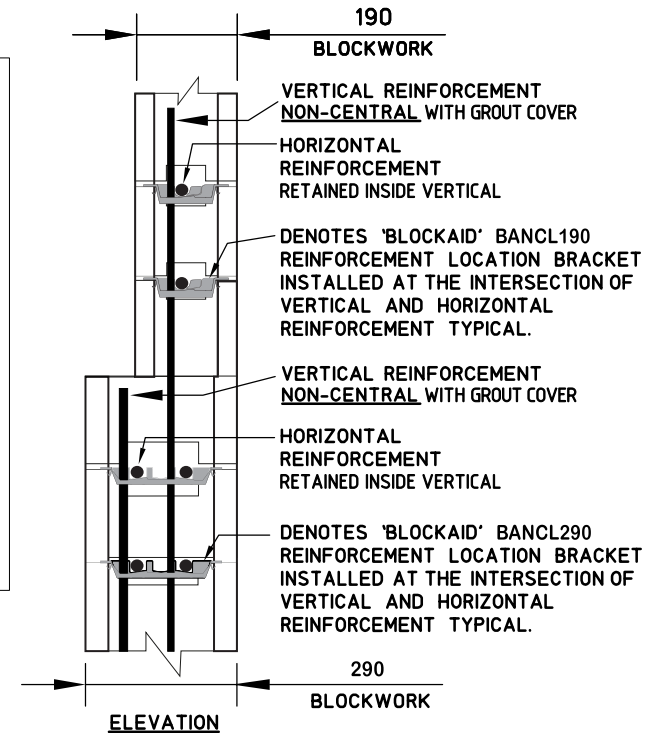

BLOCKAID BA NCL190 & BA NCL290
SCALE 1:10

RECOMMENDED INSTALLATION:
BLOCKAID AT ALL REINFORCEMENT INTERSECTIONS
MINIMUM SLUMP 250MM WITH 7-10MM AGGREGATE
VIBRATE OR ROD TO COMMON PRACTICE

NOTE:
REINFORCED MASONRY UNDER OUT-OF-PLANE LOAD,
GROUT COVER TO REINFORCEMENT SHALL BE MAINTAINED BY THE USE OF PLASTIC 'BLOCKAID' REINFORCEMENT LOCATION BRACKETS AT THE INTERSECTION OF ALL HORIZONTAL AND VERTICAL REINFORCEMENT.

TYPICAL 140, 190 & 290 BLOCKWORK - BLOCKAID BAR CHAIR DETAILS