



1

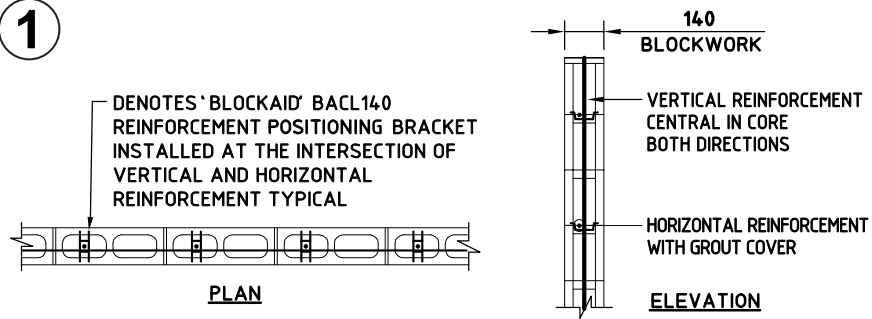

BLOCKAID - BACL140

2

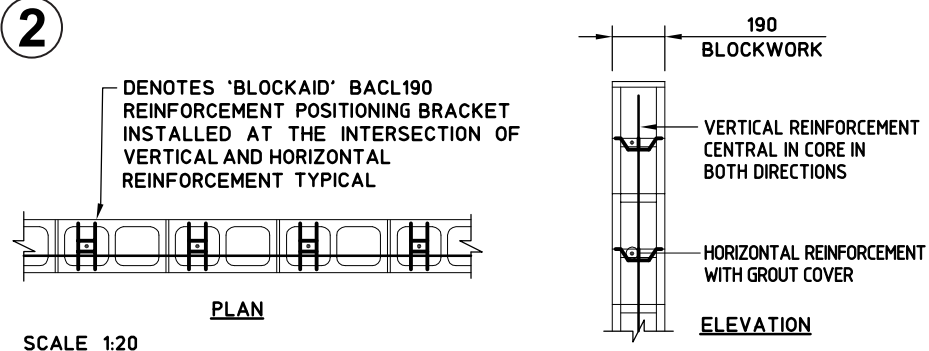


BLOCKAID - BACL190

BLOCKAID BACL190 PROVIDES AN ANNULUS OF GROUT 2 TIMES THE DIA OF THE VERTICAL BAR, LOCATED SYMMETRICALLY IN THE CROSS SECTION

SCALE 1:10


3

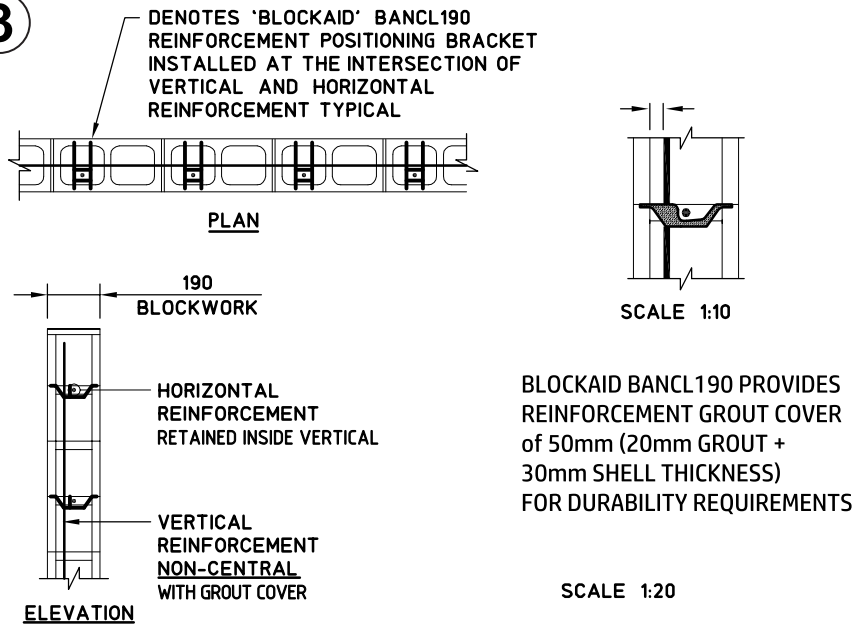

BLOCKAID - BANCL190

RECOMMENDED INSTALLATION:
BLOCKAID AT ALL REINFORCEMENT INTERSECTIONS
MINIMUM SLUMP 250MM WITH 7-10MM AGGREGATE
VIBRATE OR ROD TO COMMON PRACTICE


4

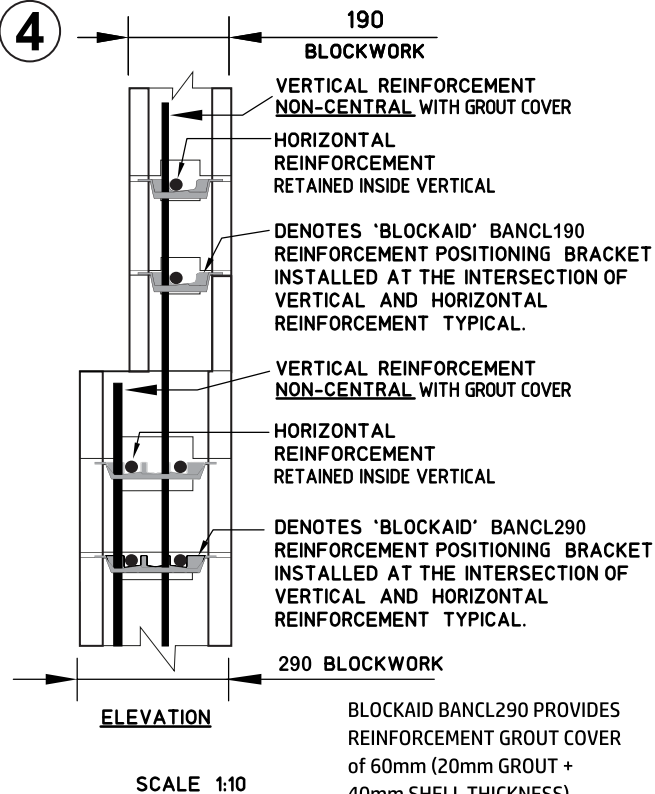

BLOCKAID BANCL190 & BANCL290

BLOCKAID BANCL290 PROVIDES REINFORCEMENT GROUT COVER of 60mm (20mm GROUT + 40mm SHELL THICKNESS) FOR DURABILITY REQUIREMENTS

5

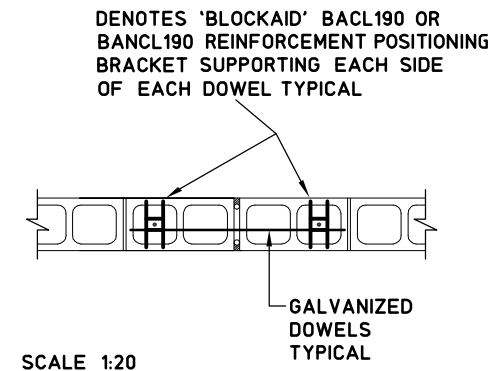

TYPICAL BLOCKWALL VCJ 'BLOCKAID' DETAIL

NOTE:
REINFORCED MASONRY UNDER OUT-OF-PLANE LOAD,
GROUT COVER TO REINFORCEMENT SHALL
BE MAINTAINED BY THE USE OF PLASTIC
'BLOCKAID' REINFORCEMENT POSITIONERS
AT THE INTERSECTION OF ALL THE
HORIZONTAL AND VERTICAL REINFORCEMENT.

BlockAid®
REBAR POSITIONERS FOR MASONRY

TYPICAL 140, 190 & 290 BLOCKWORK - BLOCKAID REBAR POSITIONER DETAILS